INSTALLATION INSTRUCTIONS

Item#72433-261

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig.1)

1. Insert front glass (K) into door (J), and secure with clips (L)
2. Insert back glass (M) and side glass (N) into lamp body (H) and secure with clips (I).

MOUNTING THE FIXTURE (Fig.2)

3. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
4. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
5. Thread screws (A) into the pre-drilled holes in the circular strap (C) spaced the same distance apart as the holes in the back plate of the fixture body and secure with hex nut (B).
6. Attach the circular strap (C) to the junction box using the mounting screws (D) (size: #8-32N*L0.5").The side of circular strap (C) marked "GND" must face out.
7. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to circular strap (C) and attach hook (G) on the end of support cable into a slot located on circular strap (C). Carefully allow the support cable to support the weight of the fixture while wiring. (Fig 2)

CONNECTING THE WIRES (Fig. 3)

8. At this point, connect the electrical wires as shown in figure3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the ground wire from the fixture directly to the circular strap (C) and secure with the green screw provided. After wires are connected, tuck them carefully into the outlet box. with cap nuts (F).

FINISHING THE INSTALLATION (Fig.2)

9. To prevent moisture from entering the outlet box and causing a short, use clear silicone sealant to outline the outside of fixture back plate (E) where it meets the wall leaving a space at bottom to allow moisture a means to escape. **(Fig. 4)**
10. Install the light bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**. **(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) (Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

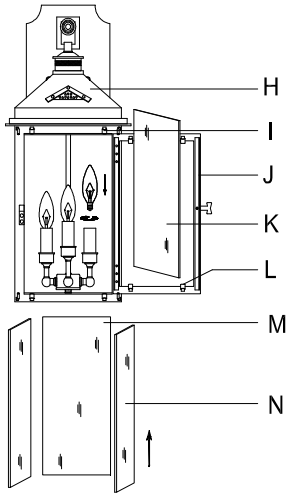

Fig. 2

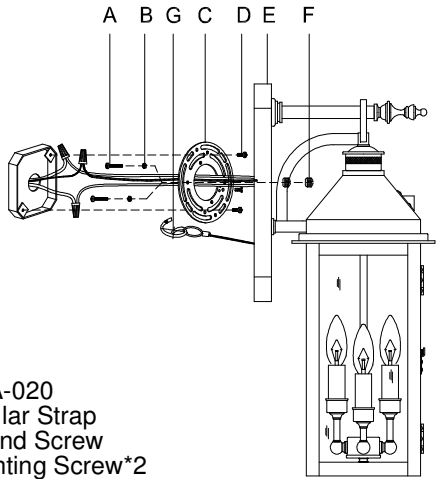

Set# A-020
- Circular Strap
- Ground Screw
- Mounting Screw*2

Fig. 3

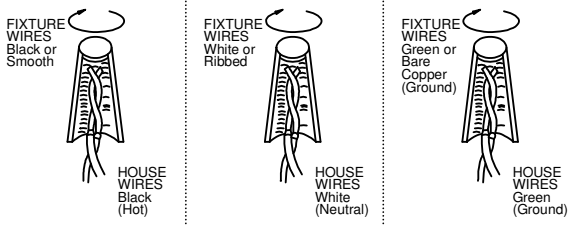
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Green or Bare Copper (Ground)
HOUSE WIRES Green (Ground)

american lighting association

Intertek

Fig. 4